


1. Description

. Part number: CMX06A03

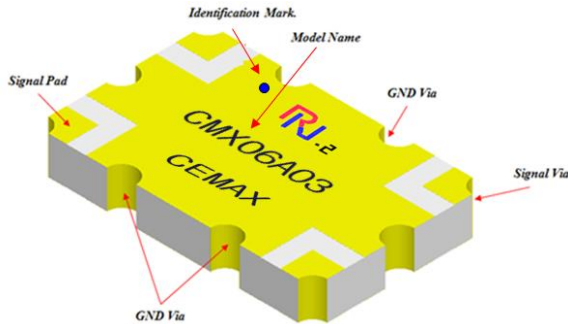


. Features

- Surface mount type
- **RoHS** Compliance (Pb Free)
- LTCC base (Er = 6)
- Low loss Silver (Ag) Conductor
- Gold (Au) plating finish

2. Electrical Specification

Freq. (MHz)	Amplitude Balance max (dB)	Isolation min (dB)	Insertion Loss max (dB)
470-860	± 0.50	-23	-0.20
600-800	± 0.15	-23	-0.17
VSWR	Phase Balance (degrees)	Power Capacity Avg. (Watt)	Operating Temp. (°C)
Max	90 ± 2.0	300	-55 ~ 125
1.15	90 ± 2.0	300	-55 ~ 125

3. Mechanical Specification

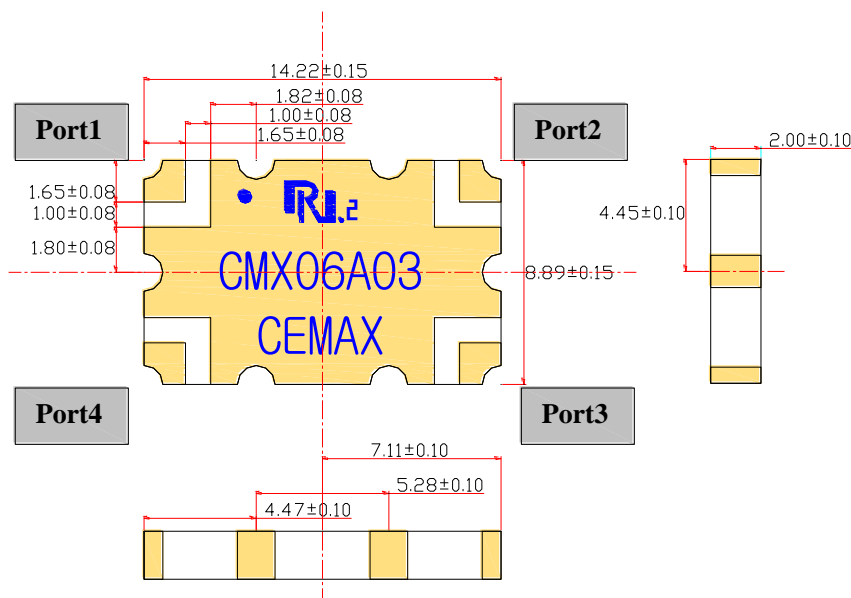

[Unit = mm]

4. Schematic Drawing




5. Port Configuration





Configuration	Port 1	Port 2	Port 3	Port 4
Case 1.	Input	Isolated	Output -3dB, -90°	Coupling -3dB, 0°
Case 2.	Isolated	Input	Coupling -3dB, 0°	Output -3dB, -90°
Case 3.	Output -3dB, -90°	Coupling -3dB, 0°	Input	Isolated
Case 4.	Coupling -3dB, 0°	Output -3dB, -90°	Isolated	Input

* Once Port 1 is determined, the other three ports are defined automatically.



6. Operating Temperature Curve (1)

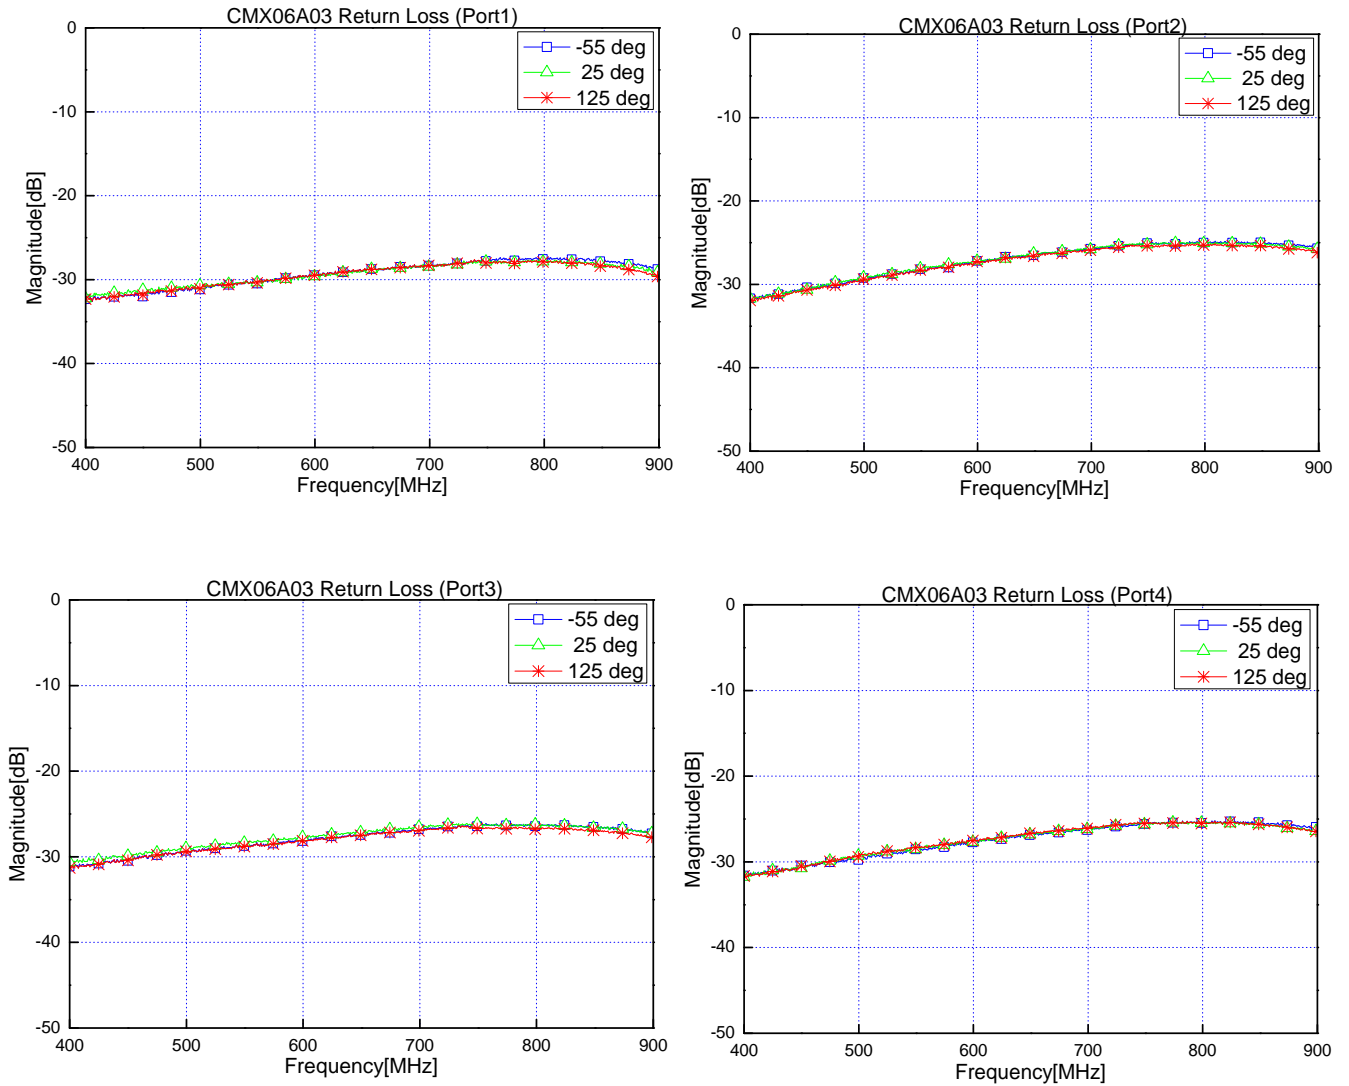

7. Operating Temperature Curve (2)

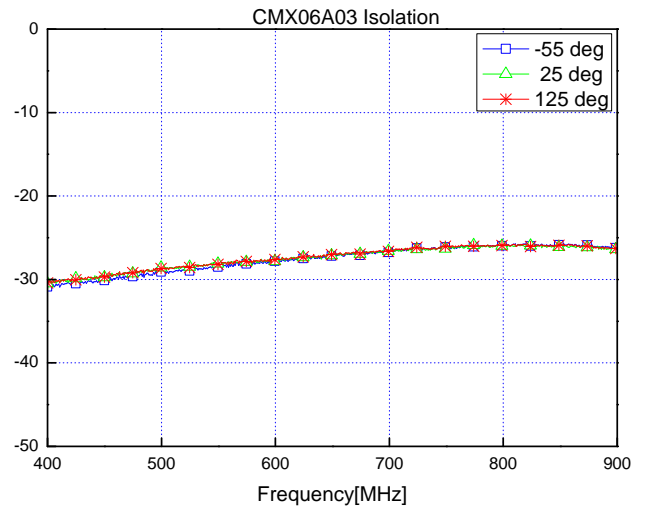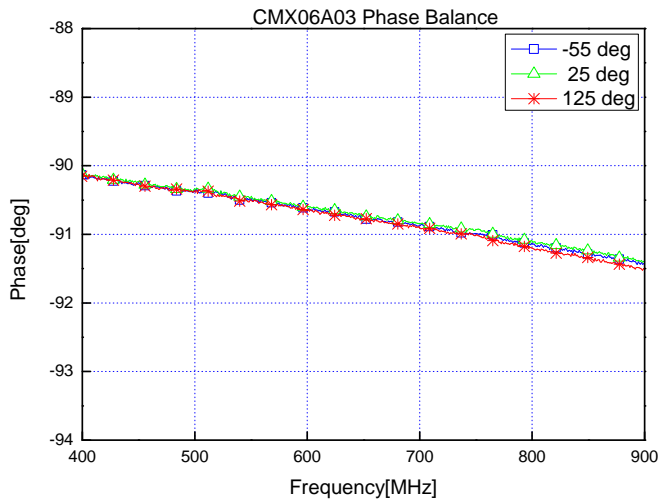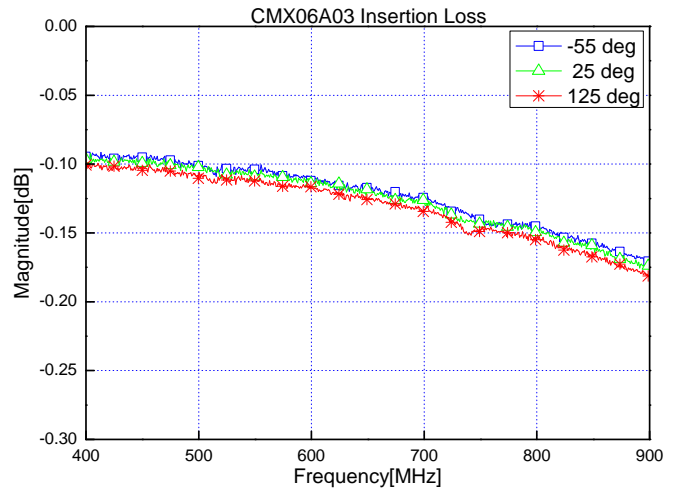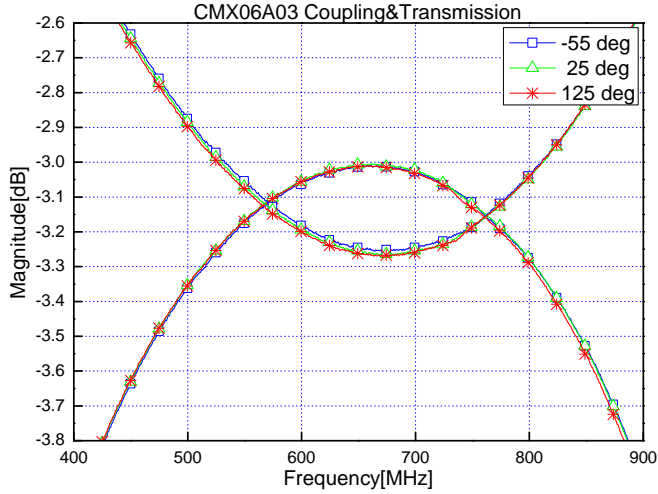

8. Test Method

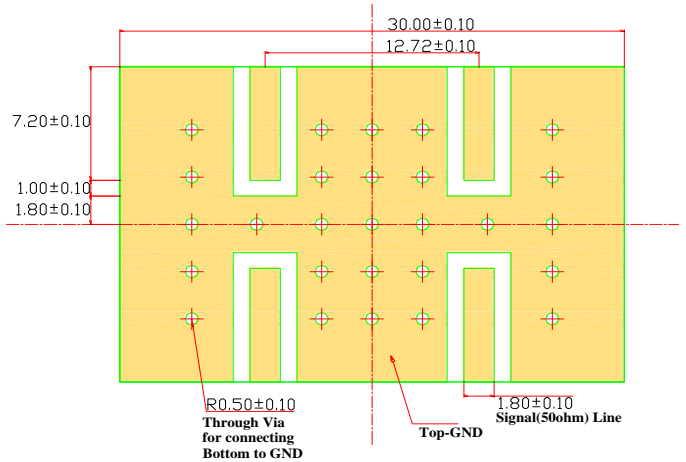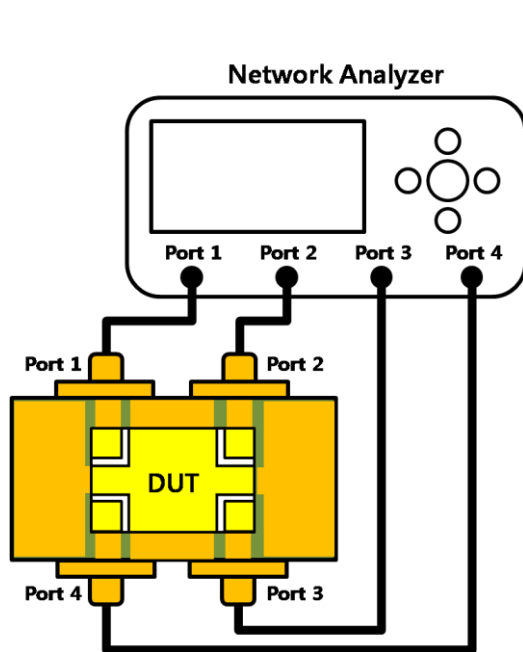

- * RN2 Test Board
- Taconic RF35 board
 - Dielectric constant 3.5
 - Board thickness 0.8mm
 - Copper 1/2 Oz

To recognize the specified performance of the part, it has to be evaluated on the RN2 test board shown above.

1. Calibrate the network analyzer
2. Measure the data of **Return Loss** through Port 1 to Port 1 (S11)
3. Measure the data of **Coupling** through Port 1 to Port 4 (S41)
4. Measure the data of **Transmission** through Port 1 to Port 3 (S31)
5. Measure the data of **Isolation** through Port 1 to Port 2 (S21)
6. Calculate **Insertion Loss** and **Amplitude Balance** in function of the below mathematical formula.


Parameter	Mathematical formula
Insertion Loss (dB)	$10 \cdot \log \left(\frac{P_{in}}{P_{cou} + P_{out}} \right)$
Amplitude Balance (dB)	$10 \cdot \log \left(\frac{P_{cou}}{\frac{P_{cou} + P_{out}}{2}} \right)$

9. Recommended PCB layout and Solder mask pattern

PROJECTION	No.	DATE	REVISION & DESCRIPTION	SIGNATURE	
				REVIEWED	CHECKED
	1	2011.07.21	New - Drawing		
	2				
	3				

Attention: Solder Resistor Area

Solder Resistor should be printed on the board.

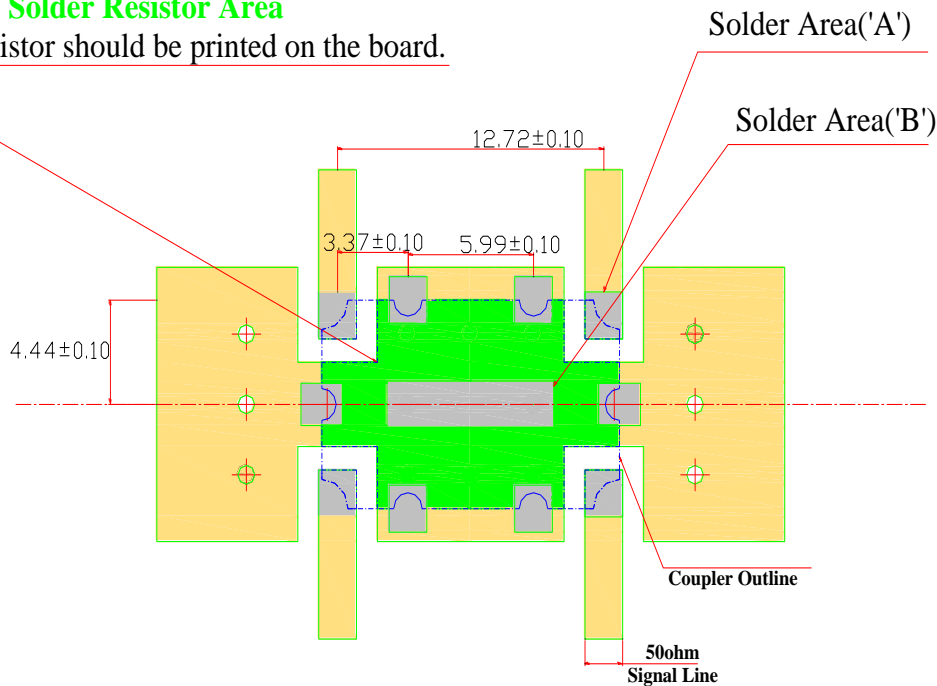

NOTE.

1. Test Solder Cream : SAC-305 (Alpa Metal)
2. Lead Free Solder Alloy : Sn/Ag/Cu Ratio Of 96.5/3.0/0.5
3. Solder Area ('A') Demension : 2.0 mm by 1.8 mm
4. Solder Area ('B') Demension : 2.0 mm by 8.0 mm

No.	DESCRIPTION	UNIT	TOTAL	PERUNIT	TOTAL				
			QUANTITY						
TITLE	A size - Recommended Solder Quantity &Area	RN2 DWG No.	11-0721-01		SCALE	1/1			
					SIZE	A4	DIMENSION	mm	