


SMD ISOLATOR
 [P/N : IL05AL(R)2600AAE]

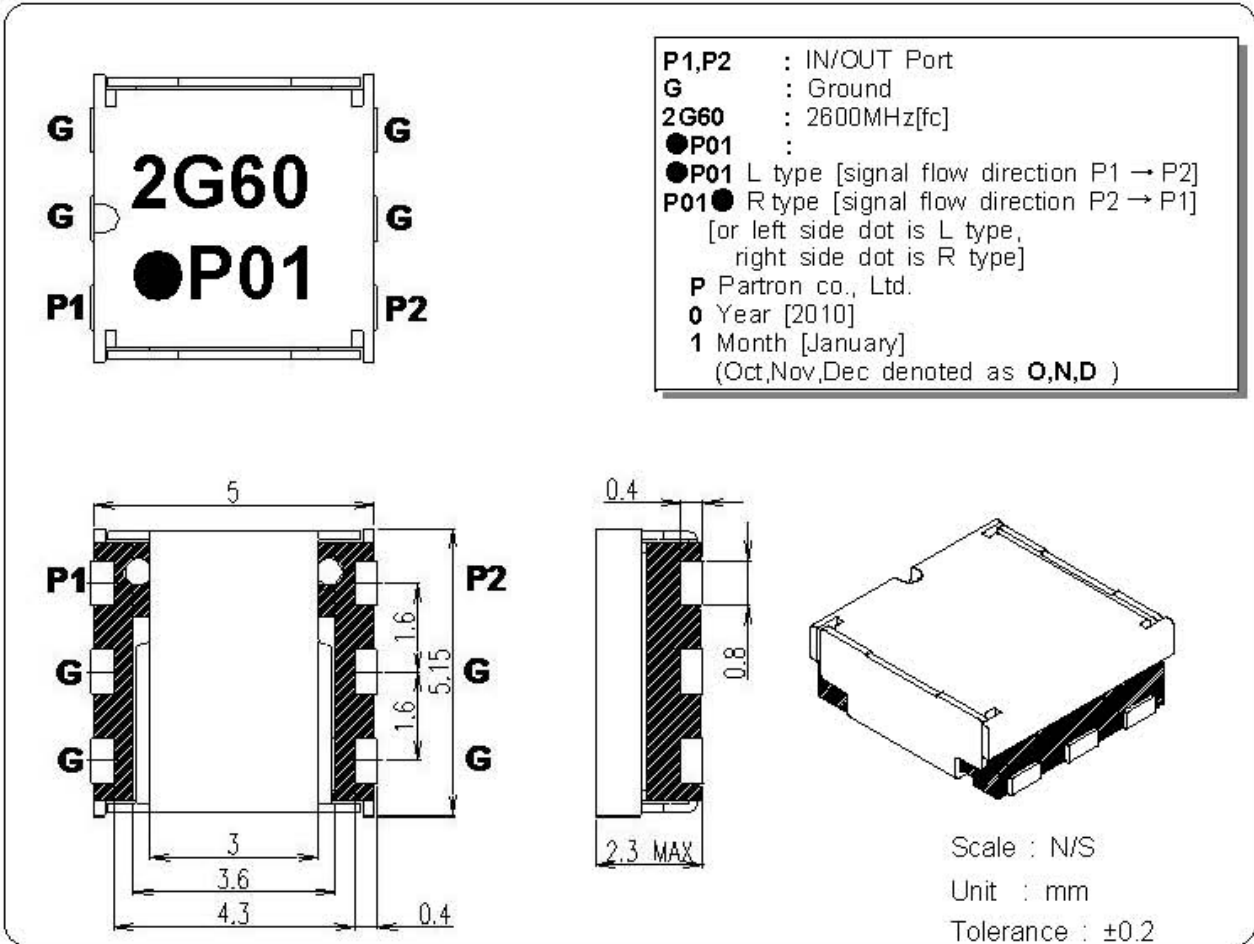

ELECTRICAL SPECIFICATION	
Frequency Range	2500 ~ 2700 MHz
Operating Temp.	-35 ~ +85 °C
Insertion Loss	0.8 dB max.
Isolation	12 dB min.
VSWR	1.6 max.
Forward Power	10 W max.
Reverse Power	2 W max.

PART NUMBERING	
IL 05 A L(R) 2600 AA E	
IL	: Isolator Group
05	: Size [5*5*2.3t]
A	: Fabrication condition
L(R)	: Signal direction
2600	: Center frequency [2600MHz]
AA	: Fabrication condition
E	: Embossed plastic reel
* RoHS Compliant(Lead Free)	
- Ver 3.0 (2012.05.01.)	